ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0121

RNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements. 2. Read and save these instructions.

Hardware Package (included):							
	10						
	Mounting Strap (A)	Mounting Screw (B)	Green Ground Screw (C)	Wire Connector (D	Fixture Mounting) Screw(E)	Lock Nut (F)	Ball Nut(G)
		O O					
	Washer (H)	Hex Nut (I)	Threaded pipe (J)	Rubber Pad (K)	Metal Pad (L)	Decorative Cover	- (M)
	Pine Cone (N)1pc	Pine Needle (O)6	pcs Small Pine Co	مرج one (P)6pcs			
Installation Steps Outlet Box House Grounding Wire Wire Nut (D) —Mounting Strap (A)							
	Turn off the power a	at fuse or circuit box	κ.		Lock nut (F) – 💶	Fixture Mour	nting Screw (E) rew (B)
1.	Attach the mounting strap to the outlet box by using two mounting screws.						y
2.	Screw the threaded pipe with hex nut end into the coupling, and tighten it with the washer and hex nut. NOTE:Depth of threaded pipe may need to be adjusted o properly fit glass shade, decorative cover and small bine cone.						
3.	Secure the small pine cones and the pine needles onto the main body as shown in the diagram.						
4.	nstall bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.				Coupling	Socket Pine Needle (O)	
5.	. Attach the glass shade to the fixture by inserting the threaded pipe,and then secure it with a rubber pad, metal pad and hex nut.					Small Pine Cone (
6.	Slip the decorative cover up through the threaded pipe, and then secure it with the pine cone.						$\overline{}$
7.	Pull out the source wires from the outlet box, make wire connections using wire nuts as follows: Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source. Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source. Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with the wire nut. Carefully put the wires back into the outlet box. Page 1/2						(K) .) Cover (M) N)


Page 1 / 2

240628

7. Attach the fixture to the mounting strap by inserting two fixture mounting screws, and then secure it with two ball nuts.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

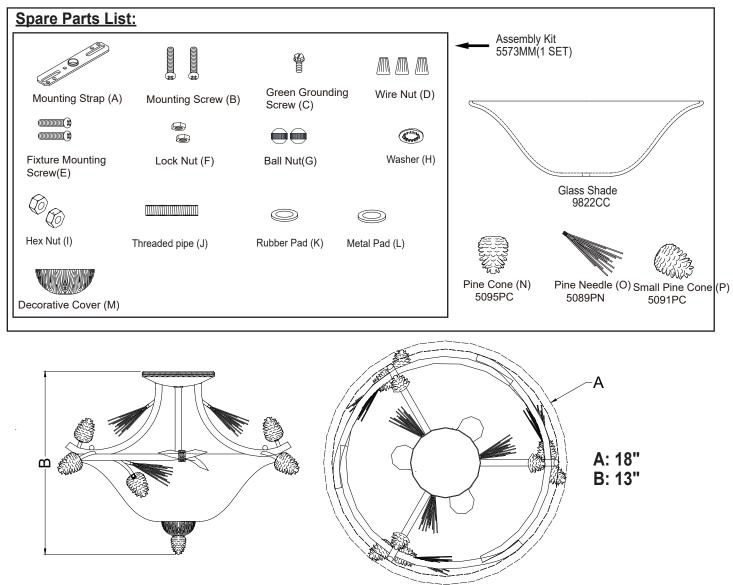

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained? info@vaxcel.com 1-800-482-9235



Page 2/2