



ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0353

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

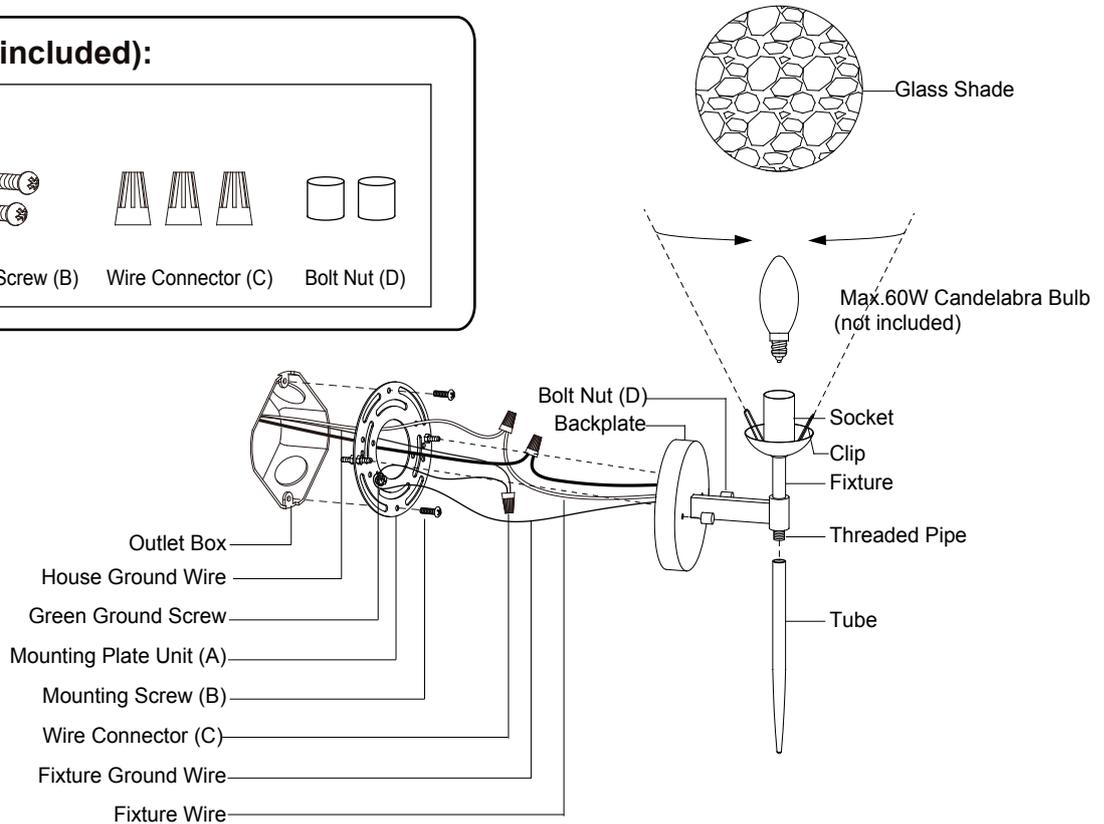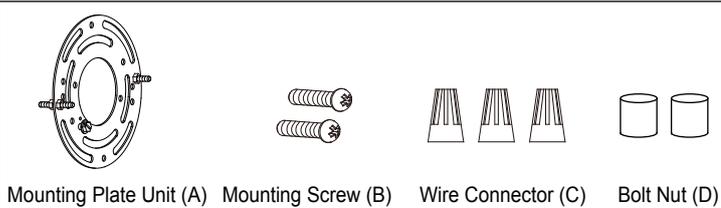

Installation Steps



Turn off the power at fuse or circuit box.

1. Attach mounting plate unit (A) to the outlet box by using two mounting screws (B).
Adjust the length of the preinstalled headless screws if necessary.
Note: Make sure that the headless screws are lined up horizontally to make the fixture level.
2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
---Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
---Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
---Attach the fixture ground wire (green insulation or bare wire) to the mounting plate unit (A) with the green ground screw, or connect to the source ground wire if available.
Carefully put the wires back into the outlet box.
3. Secure the tube to the fixture by threaded pipe.
4. Install 1 X 60W max.candelabra bulb (not included). Check relamping label at socket area or packaging for maximum wattage allowed.
5. Attach the glass shade onto the socket, then using clip to fix.
6. Attach the fixture to the mounting plate unit (A) by inserting headless screws into holes on backplate, then secure it with bolt nuts (D).

Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

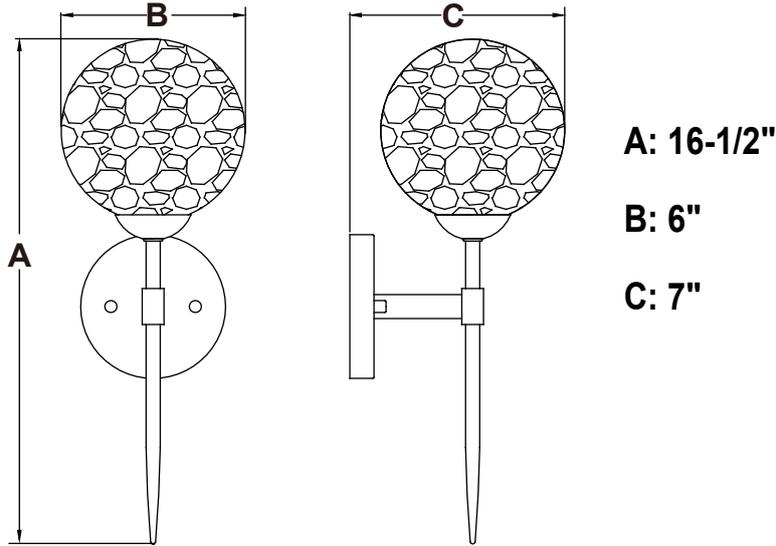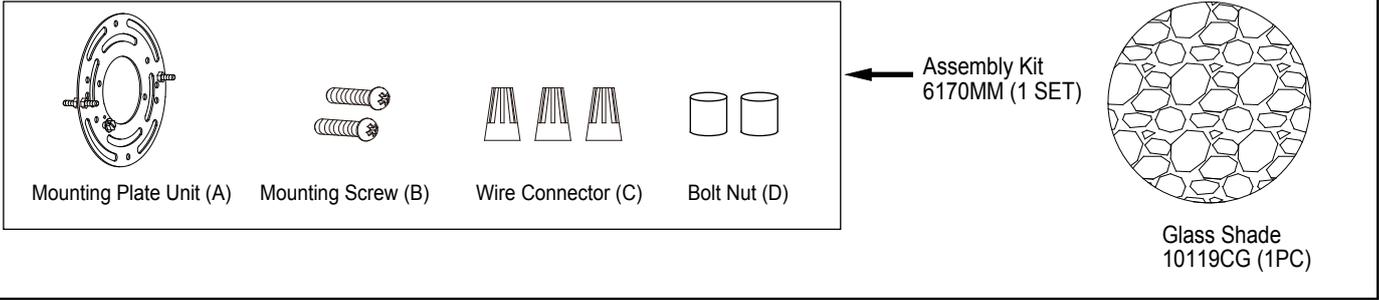

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?
info@vaxcel.com
1-800-482-9235