



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0014

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. Read and save these instructions.

## Hardware Package (included):

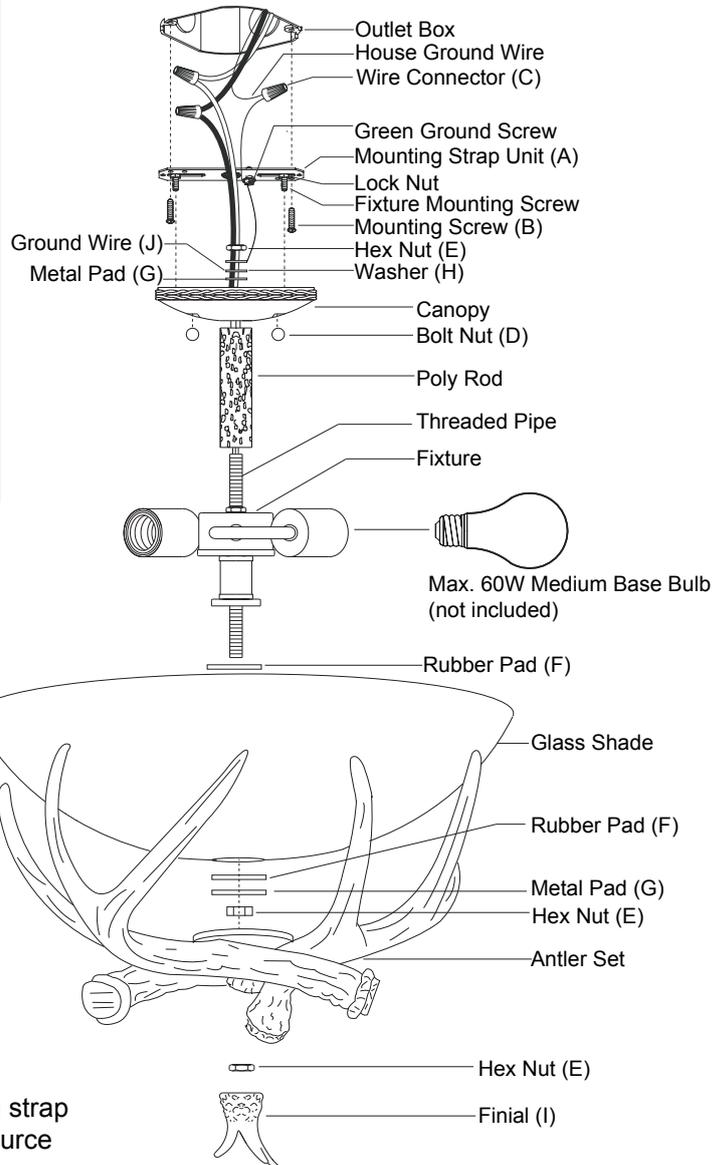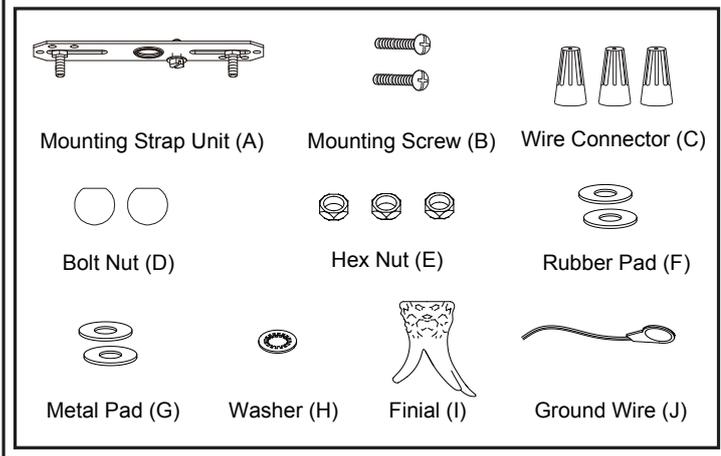

## Installation Steps

Turn off the power at fuse or circuit box



- Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
- Thread the fixture wire through the poly rod, canopy, ground wire (J). secure them with washers (H) and hex nut (E).
- Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
  - Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
  - Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
  - Attach the fixture ground wire (bare wire) to the mounting strap unit (A) with the green ground screw, or connect to the source ground wire if available.
 Carefully put the wires back into the outlet box.
- Attach the canopy to the mounting strap unit (A) by inserting the fixture mounting screws, then secure it with two bolt nuts (D).
- Install 2 x 60W Max. medium base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.
- Attach the rubber pad (F) and glass shade upward to the fixture, then secure them with a rubber pad (F), metal pad (G) and hex nut (E).
- Attach the antler set upward to the glass shade carefully by inserting the threaded pipe, and then secure it with a hex nut (E) and finial (I).

Turn on the power at fuse or circuit box

 VAXCEL


The following parts are available for reorder if damaged or missing.

**Spare Parts List:**

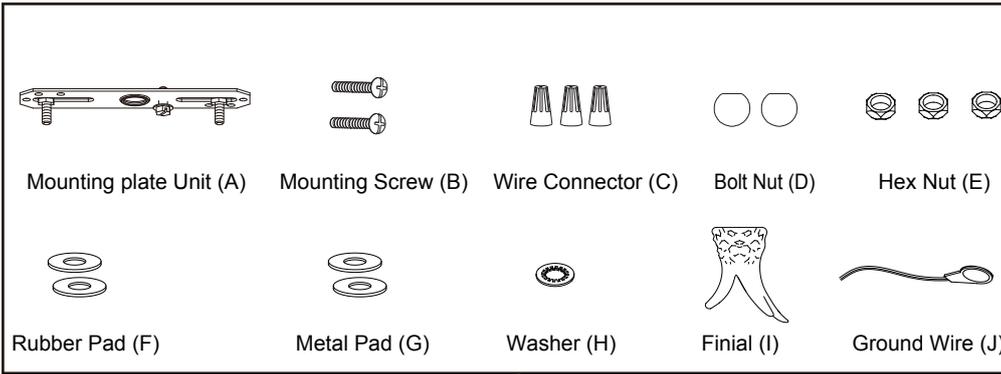

Glass Shade  
9317CR

Mounting Hardware  
4471MM (1SET)

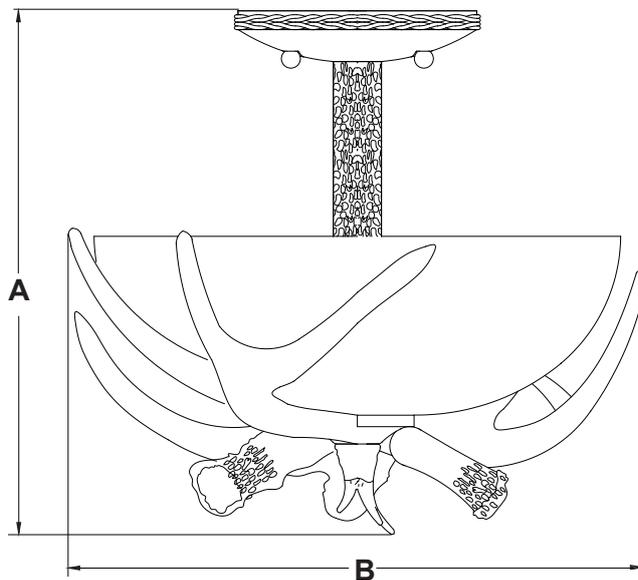

**A: 11"**

**B: 12"**

**1 Year Warranty**

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

*Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.*

*Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.*

How can warranty service be obtained?

info@vaxcel.com

1-800-482-9235



230509