



ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0118

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

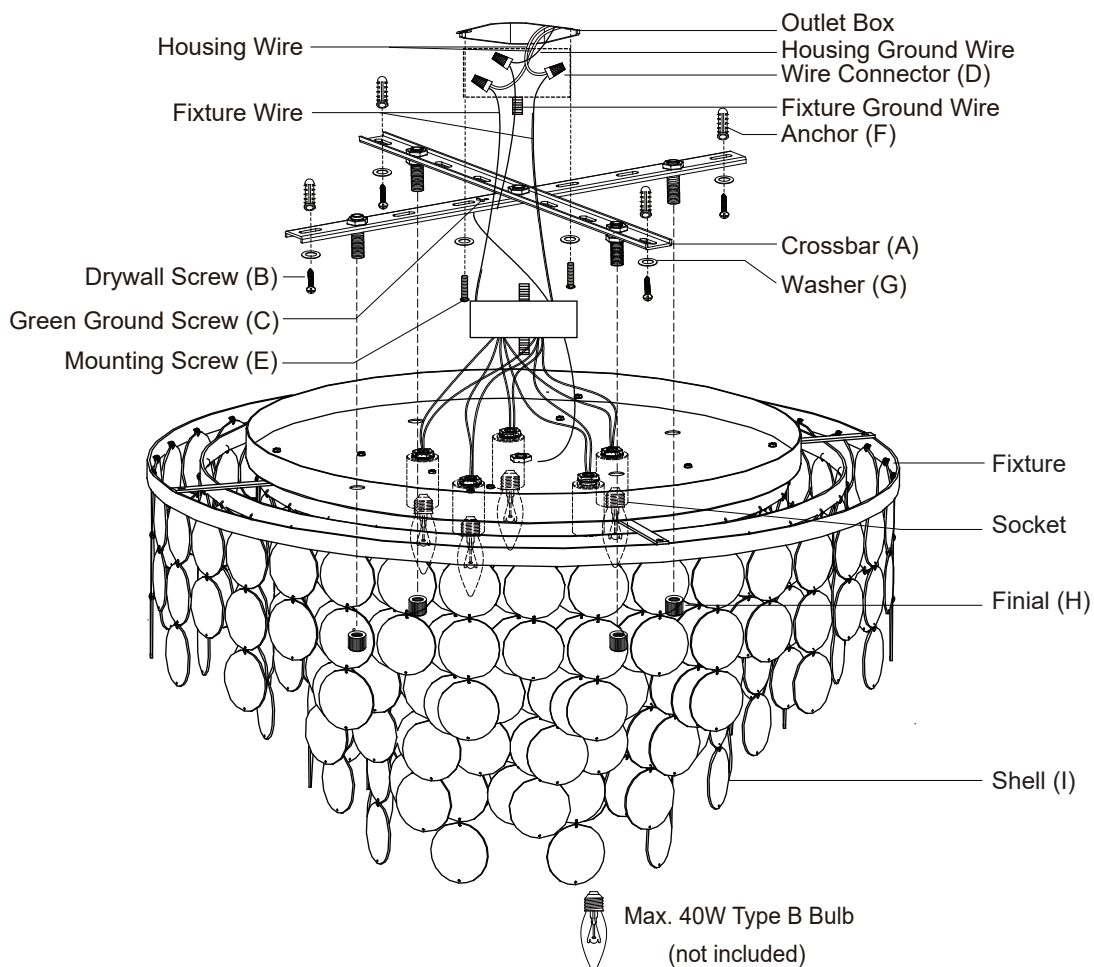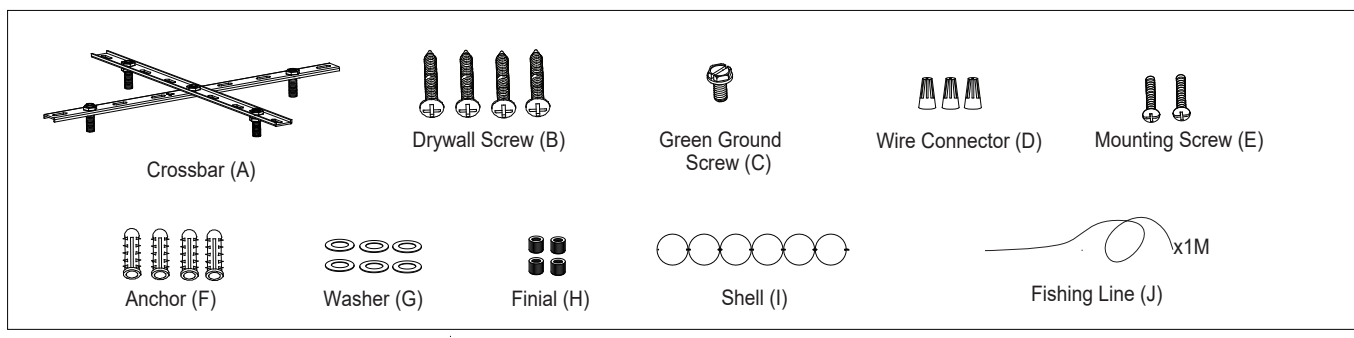


Installation Steps

Turn off the power at fuse or circuit box.

1. Remove the crossbar from the fixture by unscrewing the finial.
2. Hold the crossbar to the outlet box and mark the outermost set holes on the wall surface for drilling. Remove the crossbar from the outlet box. Drill four set holes. Thread the anchors into the holes, then attach the crossbar to the outlet box by using two washers and two mounting screws. Secure the four drywall screws with the four washers through the set holes into the anchors.
3. Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:
 - Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
 - Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
 - Attach the fixture grounding wire (bare wire) to the crossbar with the green ground screw, or connect to the source ground wire if available.Carefully put the wires back into the outlet box.
4. Install bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.
5. Attach the fixture onto the cross bar and then tighten it with four finials.

Turn on the power at fuse or circuit box.

The following parts are available for reorder if damaged or missing.

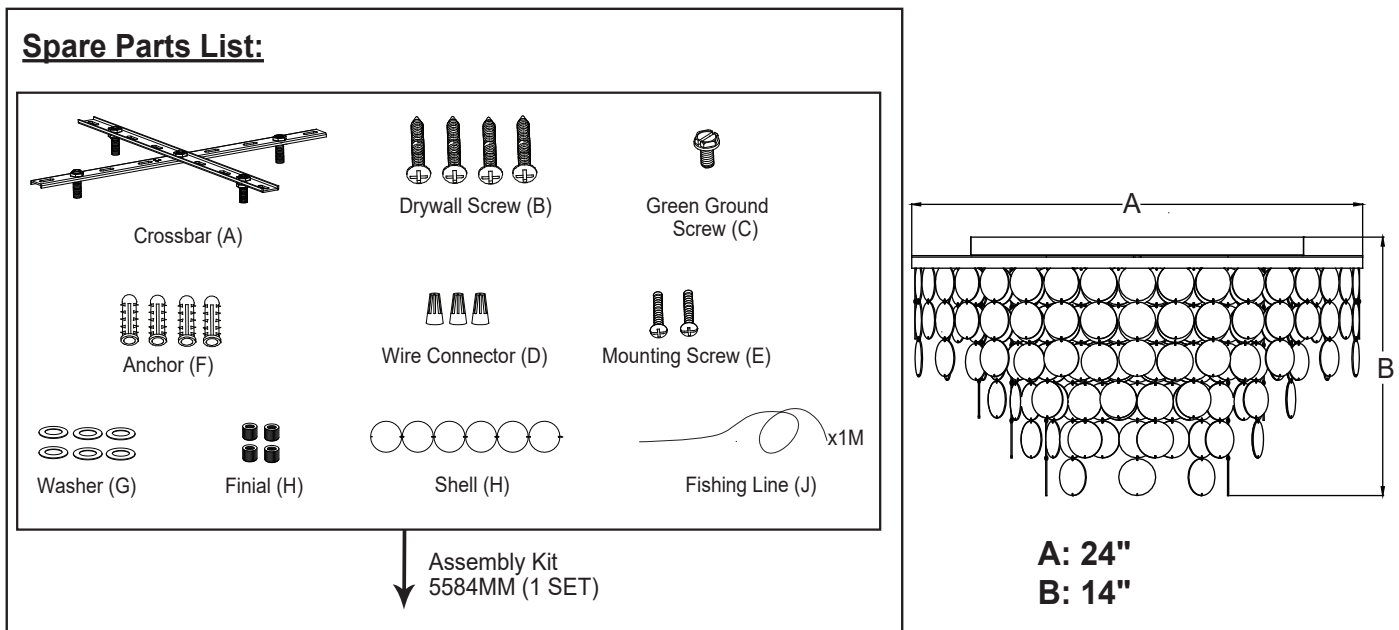

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com

1-800-482-9235