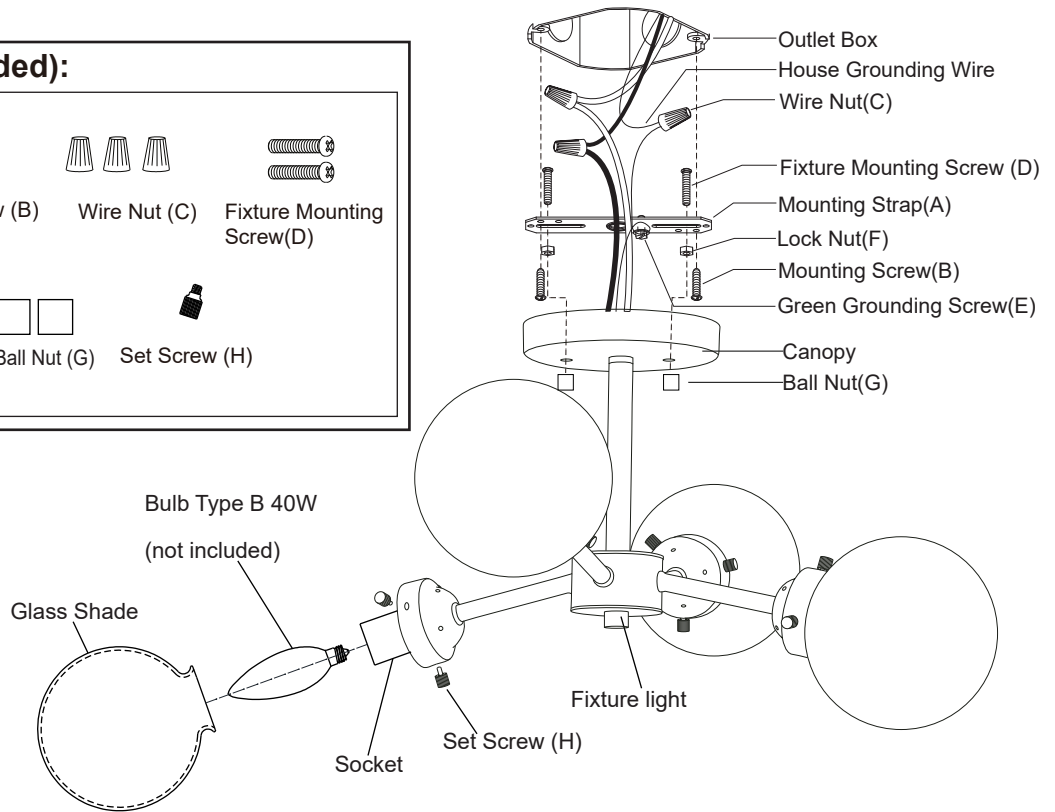
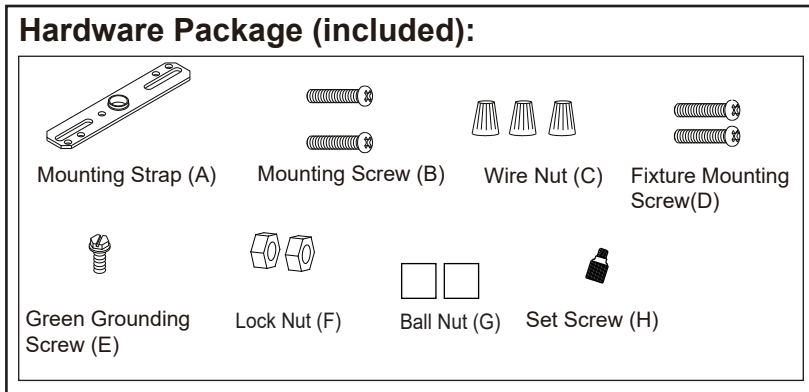


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0133

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.



## Installation Steps












Turn off the power at fuse or circuit box

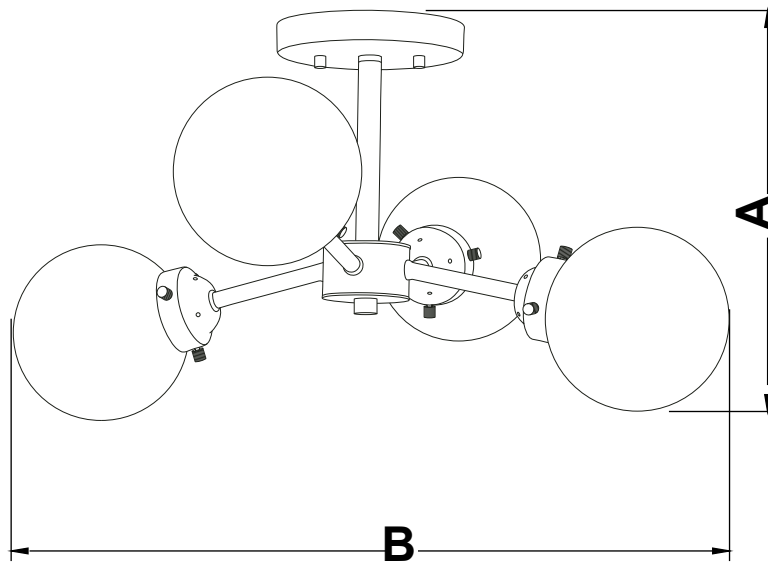
1. Attach two fixture mounting screws to the mounting strap, and then secure it with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
2. Attach the mounting strap to the outlet box using two mounting screws.
3. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
  - Connect the black wire from the fixture to the black wire from the power source.
  - Connect the white wire from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire nut.Carefully put the wires back into the outlet box.
4. Install the bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.
5. Attach the glass shade onto the socket and tighten it with set screws.
6. Attach the canopy onto the outlet and tighten it with two ball nuts.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

 Mounting Strap (A)	 Mounting Screw (B)	 Wire Nut (C)	 Fixture Mounting Screw (D)	 Green Grounding Screw (E)	 Lock Nut (F)	 Ball Nut (G)
 Set Screw (H)						
 Set Screw 5642SS	 Glass Shade 9847CG	 Assembly Kit 5641MM (1SET)				



**A: 10-1/2"**  
**B: 20"**

**1 Year Warranty**

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

*Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.*

*Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.*

How can warranty service be obtained?

info@vaxcel.com  
1-800-482-9235