


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0219

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.


## Hardware Package (included):

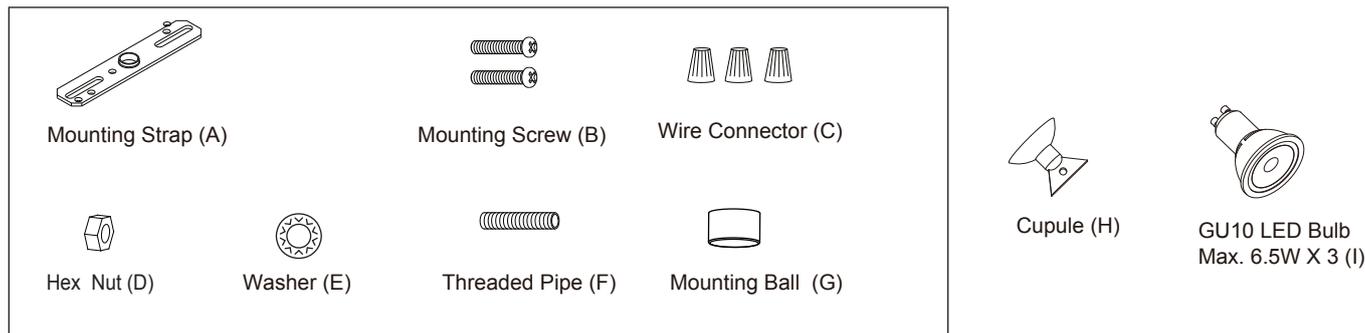

## Installation Steps

Turn off the power at fuse or circuit box

1. Attach the threaded pipe (F) through the mounting strap (A), and then secure it with a washer (E) and hex nut (D), then tighten them.
2. Attach the mounting strap (A) to the outlet box by inserting two mounting screws (B) in both side of mounting strap (A) and tighten the screws.
3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
  - Connect the black (hot) wire from the fixture to the black (hot) wire from the power source.
  - Connect the white (neutral) wire from the fixture to the white (neutral) wire from the power source.
  - Attach the fixture ground wire to the mounting strap (A) with the green ground screw. Then connect it to the house ground wire with a wire connector (C).Carefully put the wires back into the outlet box.
4. Attach the ceiling pan to the mounting strap (A) by inserting threaded pipe (F) through the center hole of the ceiling pan, and then secure it with mounting ball (G).

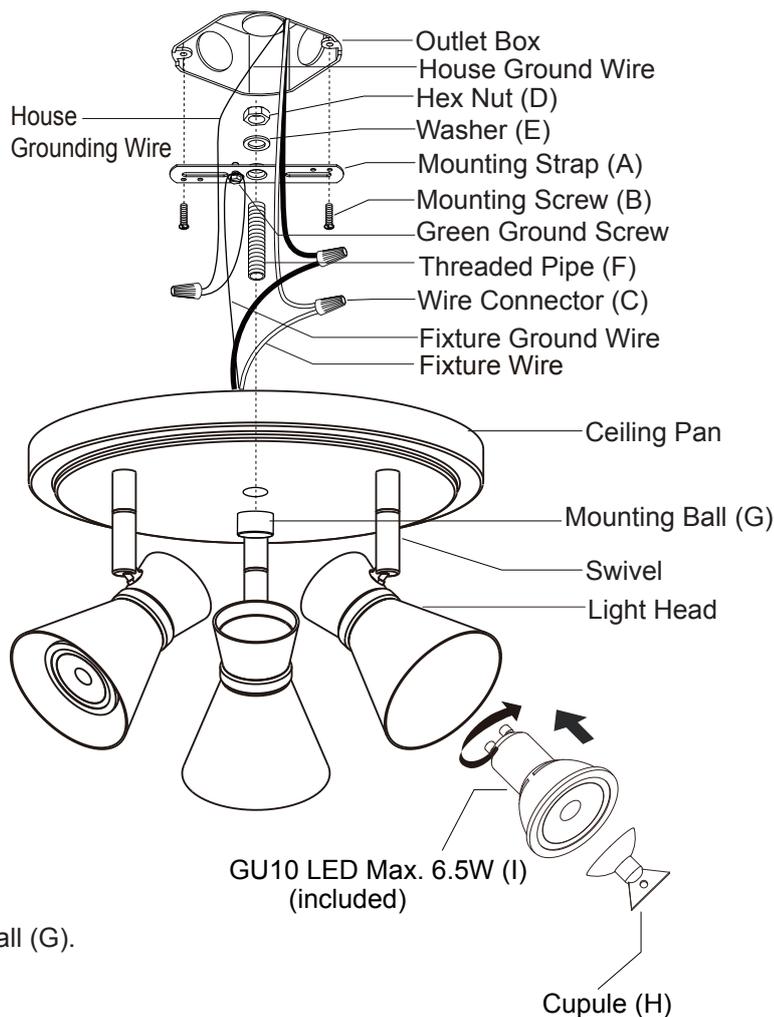

5. Attach the cupule (H) to the top surface of the bulb lens. Insert the bulb (I) into the socket using the cupule (H). Twist bulb to lock pins in place. Remove the cupule (H) from the bulb lens by pulling the knob of the cupule (H).

**Caution: LED Bulb, Type MR GU10 base, maximum 25W X 3**

**Halogen Bulb, Type MR GU10 base, maximum 50W X 3**

**Notes: LED Dimmable bulb to be compatible with most LED Dimmers, recommended Lutron: MSCL-OP153MH, MACL-153MH, DVWCL-153PH, TGCL-153PH, SCL-153PH.**

6. Follow step 5 of instructions of single light head installation for other two light heads.

7. Adjust the light head to a desired position by using the swivel.

Turn on the power at fuse or circuit box


The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

Mounting Strap (A)    Mounting Screw (B)    Wire Connector (C)    Hex Nut (D)    Assembly Kit 6065MM (1SET)

Washer (E)    Threaded Pipe (F)    Mounting Ball (G)    Cupule (H) 6070CP

GU10 LED Bulb Max. 6.5W (I) 8104 LED

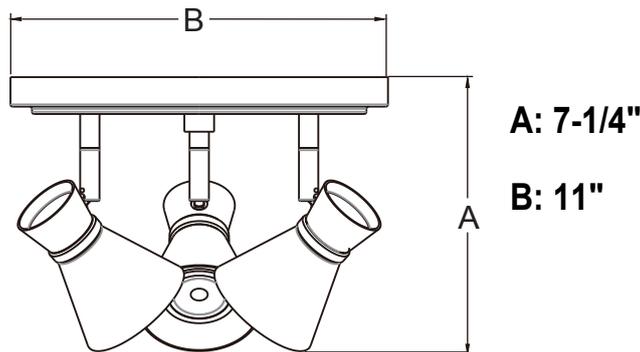

### 1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

*Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.*

*Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.*

How can warranty service be obtained?

[info@vaxcel.com](mailto:info@vaxcel.com)

1-800-482-9235