


ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0290 / T0450

WARNING: Turn off the main power at circuit breaker before installing fixture.
AVERTISSEMENT: Coupez la source d'alimentation principale au panneau central de disjoncteurs avant d'installer le luminaire.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

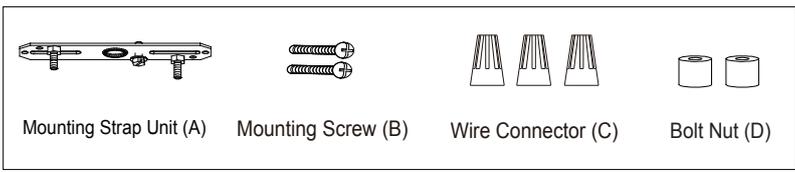

Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
2. Unscrew the finial (I), decorative cap (H), hex nut (E), metal pad (F) and rubber pad (G) from the fixture. Then remove glass assembly from the threaded pipe.
3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting strap unit (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C).
 Carefully put all of the wires back into the outlet box.
4. Attach the fixture to the mounting strap unit (A) by inserting two fixture mounting screw heads into the hole slots, then secure the bolt nuts (D). (See Fig.1)


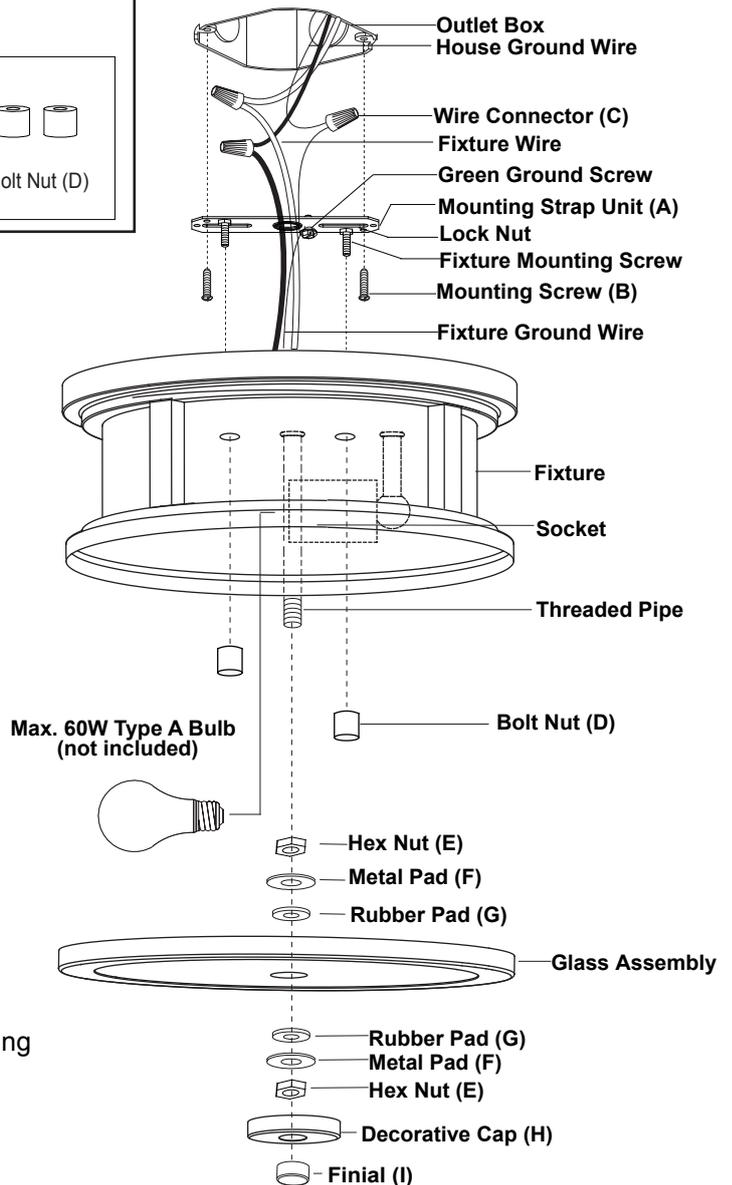


Fig.1

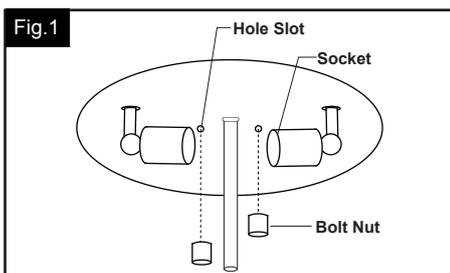



5. Install the bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.
6. Attach the glass assembly to the fixture by inserting the threaded pipe, and then secure it with the rubber pad (G), metal pad (F), hex nut (E), decorative cap (H) and finial (I).

Turn on the power at fuse or circuit box.

The following parts are available for reorder if damaged or missing.

Spare Parts List:

				<p>Mounting Hardware 6013MM (1 SET) for T0450 5606MM (1 SET) for T0290</p>
Mounting Strap Unit (A)	Mounting Screw (B)	Wire Connector (C)	Bolt Nut (D)	
				<p>Mounting Hardware 6014MM (1 SET) for T0450 5607MM (1 SET) for T0290</p>
Hex Nut (E)	Metal Pad (F)	Rubber Pad (G)	Decorative Cap (H)	

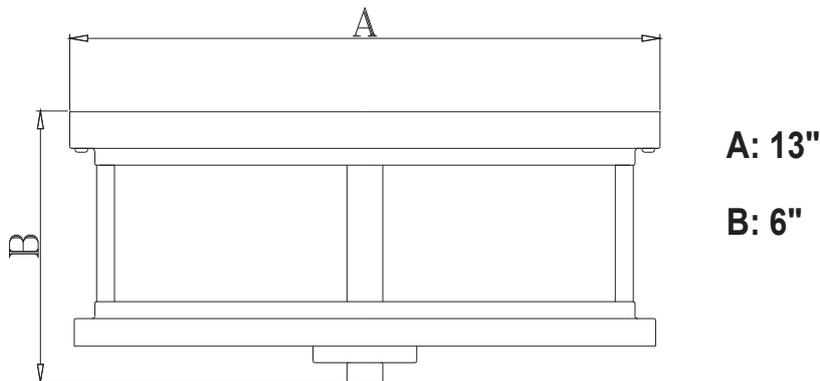

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com
1-800-482-9235