



ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0396 / T0399

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

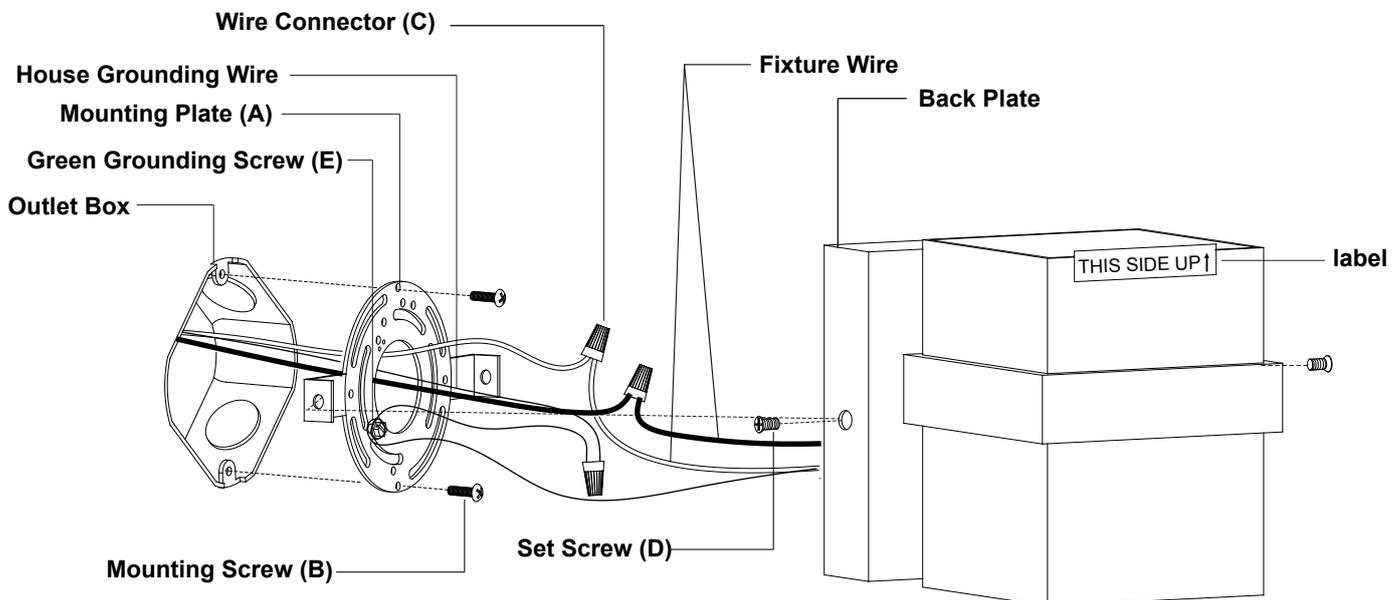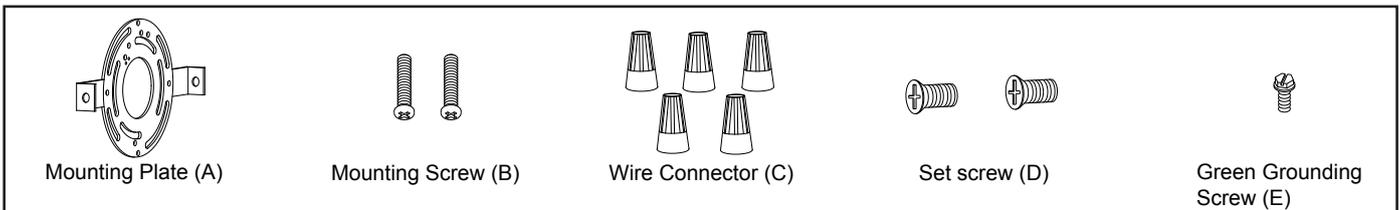

Installation Steps


Turn off the power at fuse or circuit box

1. When mounting to a wall, the "THIS SIDE UP" arrow must point upward and remove the label.
2. Attach the mounting plate to the outlet box by using two mounting screws.
3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire connectors:
 - Connect the black wire from the fixture to the black wire from the power source.
 - Connect the white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with a wire connector.Carefully put the wires back into the outlet box.
4. Attach the back plate to the mounting plate by aligning holes, secure the set screws from the side hole of the back plate into the hole in the side of the mounting plate.
5. With silicone caulking compound, caulk completely around where the back plate meets the wall surface.
CAUTION: Be sure to caulk completely where the back plate meets the wall surface to prevent water from seeping into the outlet box.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

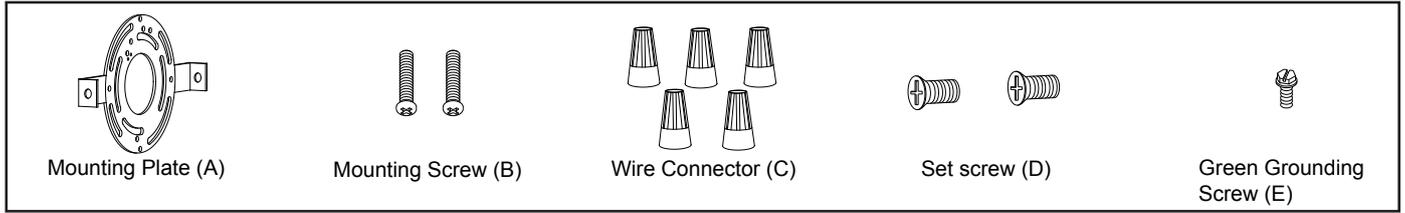

Mounting Plate (A)

Mounting Screw (B)


Wire Connector (C)

Set screw (D)

Green Grounding Screw (E)

Mounting Hardware 5818MM (1 SET) For T0396

Mounting Hardware 5819MM (1 SET) For T0399

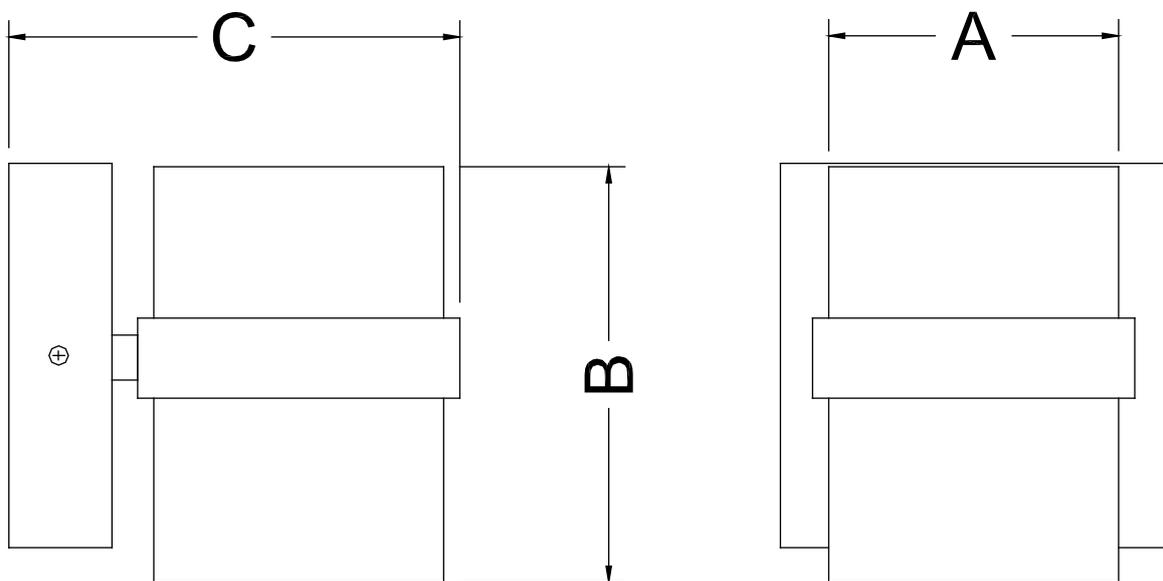

A: 4"

B: 4-3/4"

C: 5-1/2"