





ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0247

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

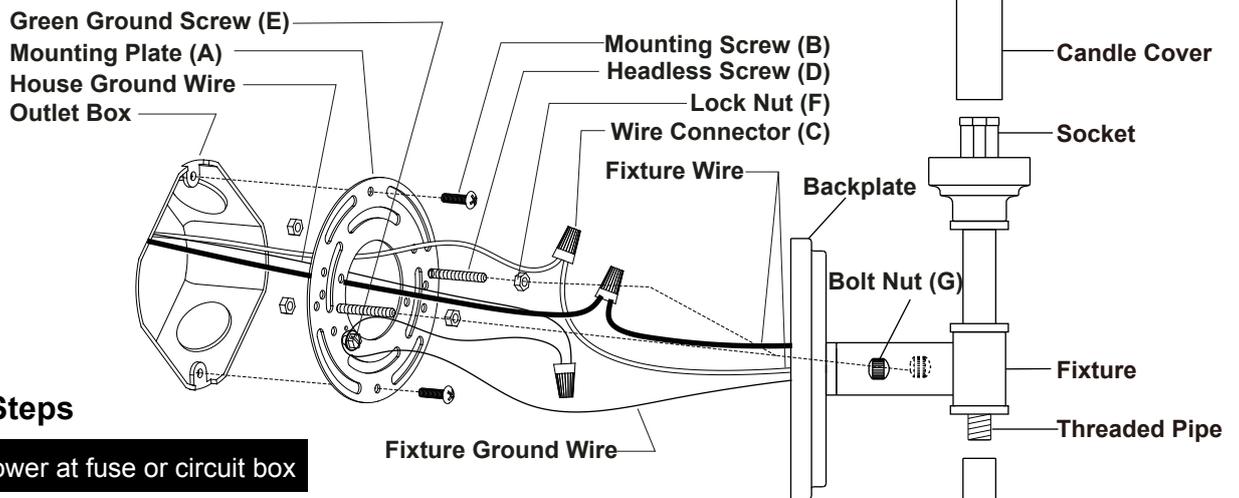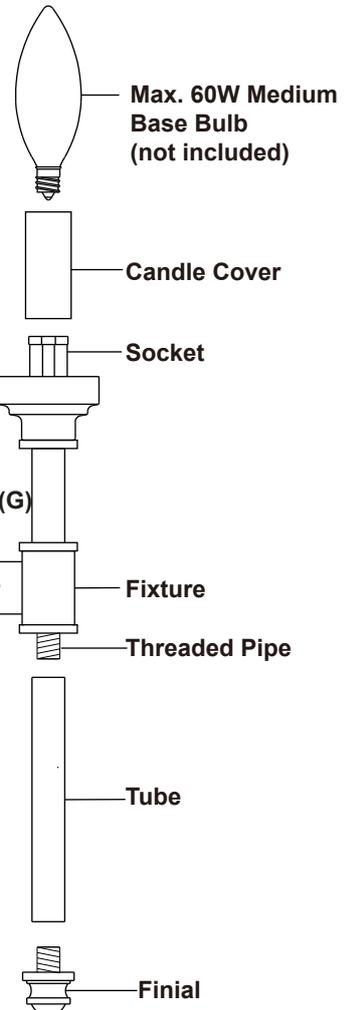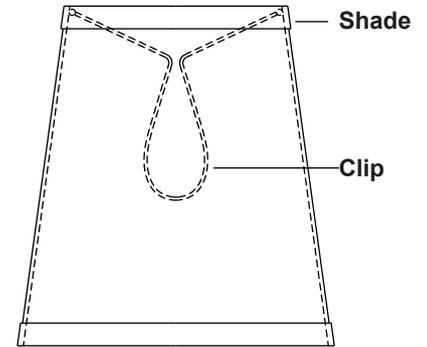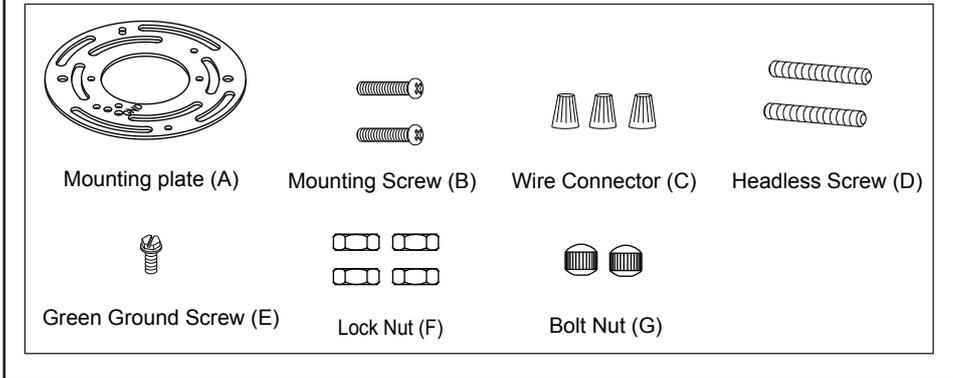

Installation Steps

Turn off the power at fuse or circuit box

1. Thread two headless screws (D) through the mounting plate (A), then secure them with four lock nuts (F) (two on each side of the mounting plate). Adjust the length of the headless screws (D) if necessary.
Note: Make sure that the headless screws are lined up horizontally, in order to ensure that the fixture will be level.
2. Attach the mounting plate (A) to the outlet box by using two mounting screws (B).
3. Place the candle cover onto the socket to cover the socket completely.
4. Attach the tube to the fixture by inserting the threaded pipe, then secure it with the finial.
5. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting plate (A) with green ground screw (E), then depending on local code, connect it to the house ground wire with the wire connector (C).
 Carefully put all of the wires back into the outlet box.

6. Attach the fixture to the mounting plate (A) by inserting the headless screws (D) , then secure it with the bolt nuts (G).
7. Install 1 x 60W max. medium base bulbs (not included). See relamping label on socket area or packaging for maximum wattage allowed.
8. Place the shade onto the bulb and allow the clip of the shade to hold the shade.

Turn on the power at fuse or circuit box

The following parts are available for reorder if damaged or missing.


Spare Parts List:

Mounting plate (A) Mounting Screw (B) Wire Connector (C) Headless Screw (D)

Green Ground Screw (E) Lock Nut (F) Bolt Nut (G)

Mounting Hardware 5621MM (1 SET)

Shade 5097FS

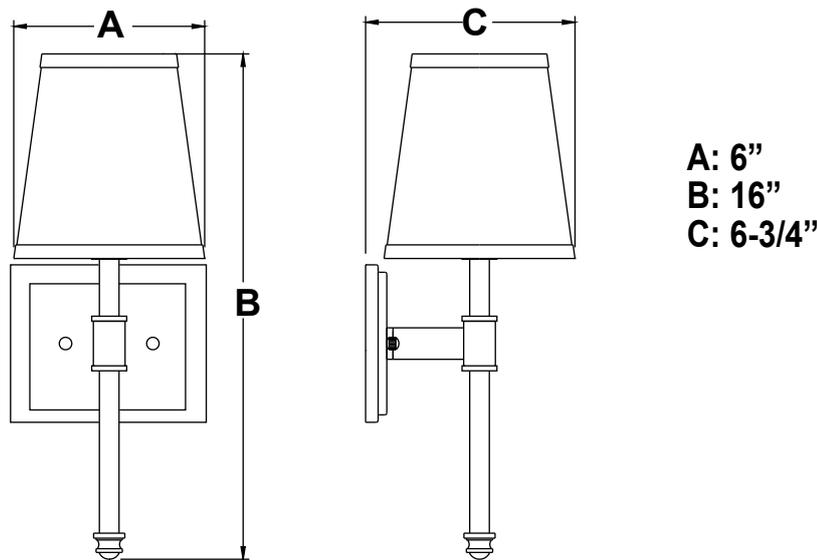

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?
 info@vaxcel.com
 1-800-482-9235