


ASSEMBLY AND INSTALLATION INSTRUCTIONS

VL26303OBB / VL26304OBB / VL26305OBB

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save this instruction.

Hardware Package (included):



Mounting Plate Unit (A)



Mounting Screw (B)



Wire Connector (C)



Bolt Nut (D)



Anchor (E)



Drywall Screw (F)




Threaded pipe (G)



Cap (H)



Finial (I)

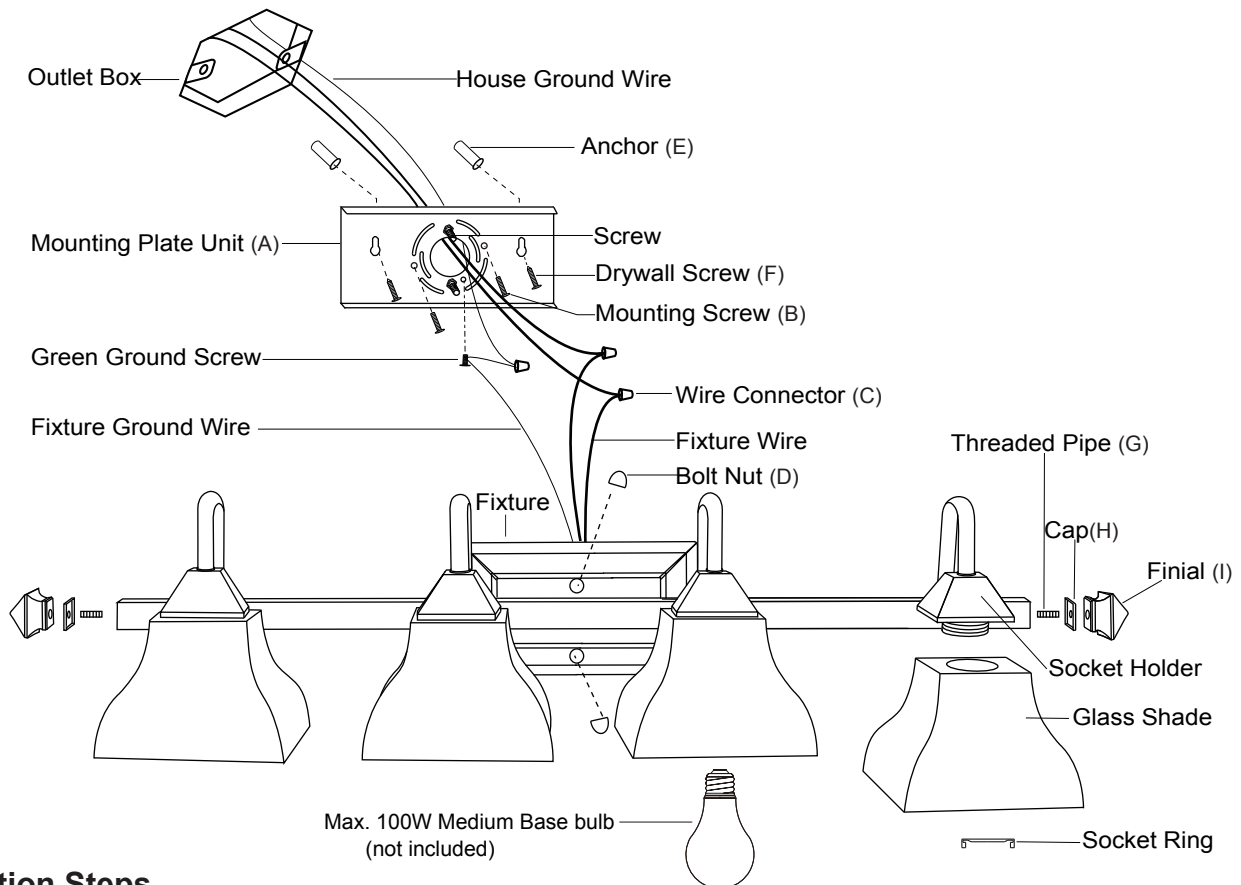

Installation Steps

Turn off the power at fuse or circuit box.


1. Place the mounting plate unit (A) to the outlet box and mark the places on the wall for drilling two holes. Thread the anchors (E) into the holes, then attach the mounting plate unit (A) to the outlet box and fasten it using two mounting screws (B). Threading the dry wall screws through the setting holes into the anchors (E).

2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting plate unit (A) with the green ground screw, then depending on local code, connect it to the house ground wire with the wire connector (C).
 Carefully put all the wires back into the outlet box.
3. Attach the fixture to the mounting plate unit (A) by inserting the screws, and secure it with the bolt nuts (D).
4. Thread the threaded pipes (G) into both ends of the fixture, attach the caps (H) onto the threaded pipes (G), and secure with the finials (I).
5. Attach the glass shades to the socket holders, then secure them with the socket rings.
6. Install 3 x 100W (4 x 100W or 5 x 100W) Max. medium base bulbs (not included). Check relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.

The following parts are available for reorder if damaged or missing.

Spare Parts List:

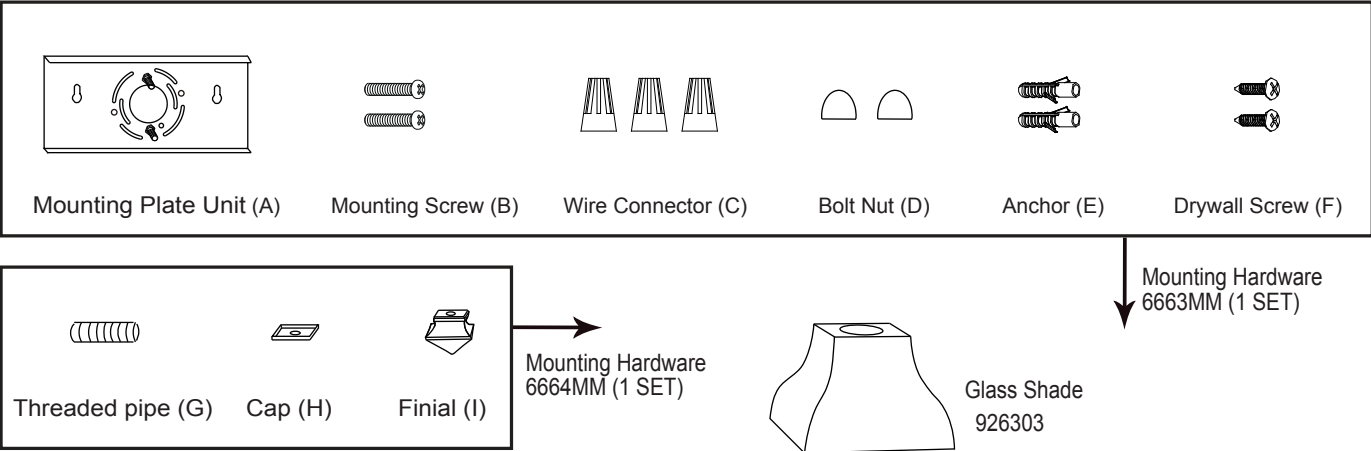


Mounting Plate Unit (A) Mounting Screw (B) Wire Connector (C) Bolt Nut (D) Anchor (E) Drywall Screw (F)

Threaded pipe (G) Cap (H) Finial (I)

Mounting Hardware 6664MM (1 SET)

Mounting Hardware 6663MM (1 SET)

Glass Shade 926303

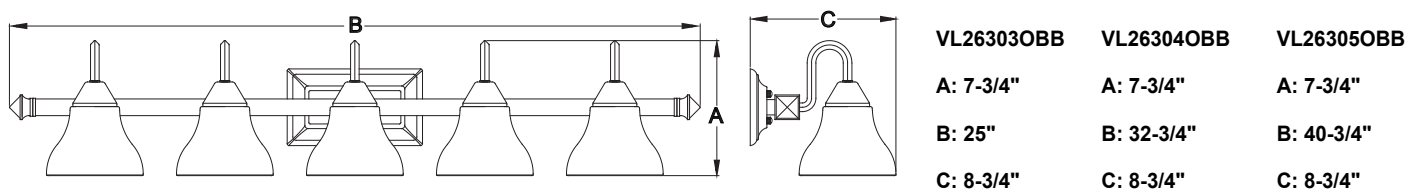

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com
1-800-482-9235