



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

CR-VLU002 / CR-VLU003 / CR-VLU004

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. Read and save these instructions.

## Hardware Package(inculded):

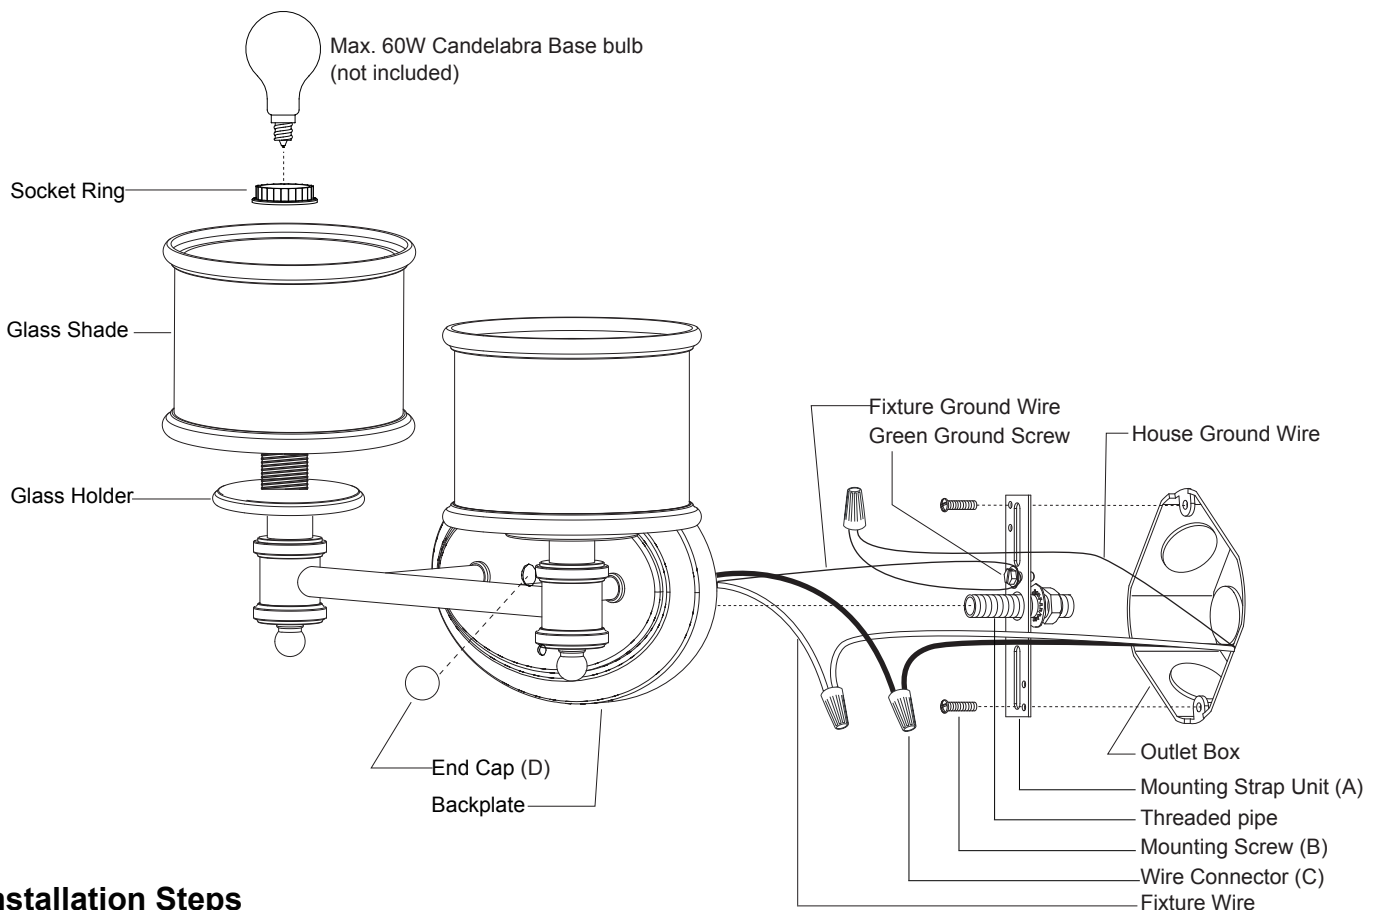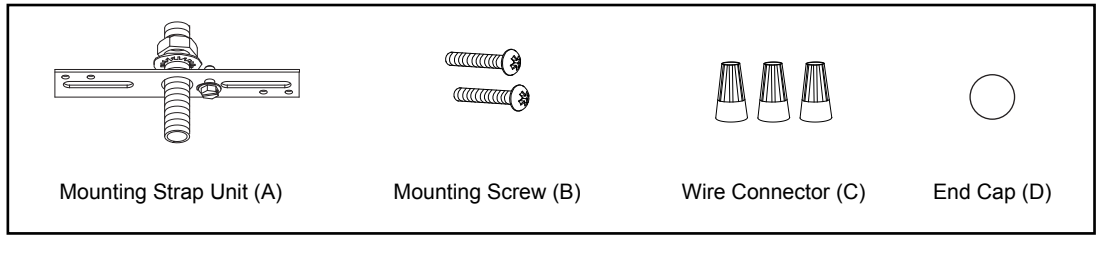

## Installation Steps

Turn off the power at fuse or circuit box.

1. Unscrew the end cap (D) from mounting strap unit (A).
2. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B). Adjust the length of the preinstalled threaded pipe if necessary.


3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
  - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
  - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
  - Attach the fixture ground wire (bare wire) to the mounting strap unit (A) with the green ground screw. Then, depending on local code, connect it to the house grounding wire with the wire connector (C).
 Carefully put all of the wires back into the outlet box.
4. Attach the backplate of the fixture to the mounting strap unit (A) by inserting the threaded pipe, then secure it with the end cap (D).
 

**Note: With silicone caulking compound, caulk completely around where the backplate meets with the wall surface to prevent water from seeping into the outlet box.**
5. Attach the glass shades onto the glass holders and secure them with the socket rings.
6. Install 2 x 60W (3 x 60W or 4 x 60W) Max. candelabra base bulb (not included). See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.


The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

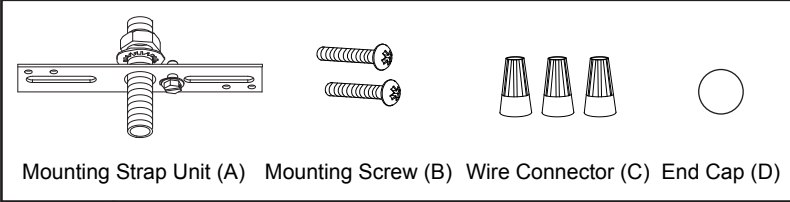


Mounting Strap Unit (A)    Mounting Screw (B)    Wire Connector (C)    End Cap (D)


Mounting Hardware  
 4143MM (1SET) for  
 CR-VLU002NB / CR-VLU003NB / CR-VLU004NB  
 4144MM (1SET) for  
 CR-VLU002CH / CR-VLU003CH



Glass Shade  
 9114FO for CR-VLU002CH / CR-VLU003CH  
 9114SO for CR-VLU002NB / CR-VLU003NB / CR-VLU004NB



Socket Ring  
 4061KK

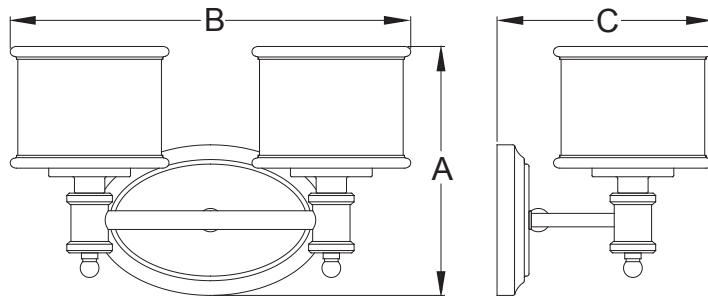

CR-VLU002	CR-VLU003	CR-VLU004
A: 8"	A: 8"	A: 8"
B: 13-3/4"	B: 22-1/4"	B: 30-1/4"
C: 7-1/2"	C: 7-1/2"	C: 7-1/2"

### 1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

*Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.*

*Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.*

How can warranty service be obtained?  
 info@vaxcel.com  
 1-800-482-9235